

Datasheet

LED TUBE T8 NON-AUTONOMOUS



GENERAL DATA

Input Voltage	100 - 240 VAC	Storage temperature	-20 °C .. +70 °C
Battery Operation	190 - 240 VDC	Operating & storage humidity	10 - 80 % rH
Operating frequency	50 - 60 Hz	Motion sensor - technology	-
Power factor	0.95	Motion sensor - transmission power	-
Peak voltage resistance	300 VACrms	Motion sensor - frequency	-
Electronic ballast compatible	No	Motion sensor - detection range (h=2.4m)	-
Form	T8	Adjustable detection range	-
Socket	G13	Communication - technology	-
Rotatable Socket	Yes	Communication - transmission power	-
Material	Al / PC / PE	Communication - frequency	-
Cooling system	Passive / 235 W/(mK)	Communication - range	-
Cover	Satin	Active time settings	-
Colour temperature **	3000 - 6000 K	Soft light start	No
Colour rendering index **	80 - 95	Basic light function	No
Colour Consistency (Mac Adam)	3	Basic light settings	No
Flicker Metric (Pst LM)	0.01	Daylight control	No
Stroboscopic effect metric (SVM)	0.01	Group parameterization	No
UGR (4H/8H; 70/50/20) (per/par)	<27.6/ <25	Swarm intelligence	No
System efficiency *	145 lm/W	Remote Access	No
Energy Class	D		
Number of switching cycles	> 500'000		
Service Life (L70B10)	50'000 h		
IP Protection class	IP20		
Protection class	II		
Risk group LED	RG0		
Operating temperature	-20 °C .. +45 °C		



SCAN
CODE FOR
PRODUCT
PAGE

* Power and luminous flux are subject to initial tolerances of +/- 5%. Unless specified otherwise, they are measured as follows: Colour temperature of 4000K, CRI of 83+2 and ambient temperature of 25°C. ** Delivery options. Standard: 4000K & CRI > 80



LENGTH DEPENDENT DATA

Nominal Length (N)	60 cm	90 cm	120 cm	150 cm
Power *	10.5 W	15 W	18 W	23.5 W
Useful luminous flux *	1500 lm	2150 lm	2650 lm	3350 lm
Weight	182 g	252 g	312 g	382 g
EPREL ID	1109633	1112517	1112807	1112808
EAN	7640185680906	7640185680975	7640185681033	7640185681101

GRAPHICS

Drawing Information

N	60 cm	90 cm	120 cm	150 cm
L	590 mm	895 mm	1200 mm	1500 mm
D	28 mm	28 mm	28 mm	28 mm
D1	31 mm	31 mm	31 mm	31 mm
P	7.5 mm	7.5 mm	7.5 mm	7.5 mm

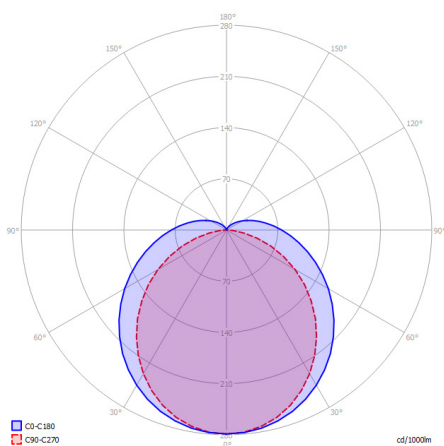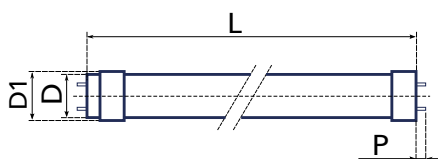

Measured on the largest available model with 4000K and CRI >80

CONTACT

LEDCity AG
 Werdstrasse 21
 CH-8004 Zurich
 info@ledcity.io

The products of LEDCity are constantly being further developed. The pictures, drawings and specifications shown here represent the current status at the time of publication of this document and cannot be used as a point of a contract. During the validity of this document we reserve the right to make technical or formal changes to our products.

* Power and luminous flux are subject to initial tolerances of +/- 5%. Unless specified otherwise, they are measured as follows: Colour temperature of 4000K, CRI of 83+-2 and ambient temperature of 25°C. ** Delivery options. Standard: 4000K & CRI > 80