



Datasheet

LED TUBE T5 NOMUS



GENERAL DATA

Input Voltage	100 - 240 VAC	Storage temperature	-20 °C .. +70 °C
Battery Operation	190 - 240 VDC	Operating & storage humidity	10 - 80 % rH
Operating frequency	50 - 60 Hz	Motion sensor - technology	Radar (RF)
Power factor	0.92	Motion sensor - transmission power	0.17 - 3.0mW
Peak voltage resistance	300 VACrms	Motion sensor - frequency	5.80 GHz
Electronic ballast compatible	No	Motion sensor - detection range (h=2.4m)	< 4m
Form	T8	Adjustable detection range	Yes
Socket	G5	Communication - technology	Wirepas Mesh
Rotatable Socket	Yes	Communication - transmission power	2.5mW
Material	Al / PC / PE	Communication - frequency	2.4 GHz
Cooling system	Passive / 235 W/(mK)	Communication - range	max. 8 - 12m
Cover	Satin	Active time settings	1s-4h
Colour temperature **	3000 - 6000 K	Soft light start	Yes
Colour rendering index **	80 - 95	Basic light function	Yes
Colour Consistency (Mac Adam)	3	Basic light settings	0-100% / 1% step
Flicker Metric (Pst LM)	0.03	Daylight control	Yes
Stroboscopic effect metric (SVM)	0.02	Group parameterization	Yes
UGR (4H/8H; 70/50/20) (per/par)	<27.8/ <25	Swarm intelligence	Yes
System efficiency *	147 lm/W	Remote Access	Yes
Energy Class	D		
Number of switching cycles	> 500'000		
Service Life (L70B10)	90'000 h		
IP Protection class	IP20		
Protection class	II		
Risk group LED	RG0		
Operating temperature	-20 °C .. +45 °C		




SCAN
CODE FOR
PRODUCT
PAGE

* Power and luminous flux are subject to initial tolerances of +/- 5%. Unless specified otherwise, they are measured as follows: Colour temperature of 4000K, CRI of 83+2 and ambient temperature of 25°C. ** Delivery options. Standard: 4000K & CRI > 80

LENGTH DEPENDENT DATA


Nominal Length (N)	55 cm	85 cm	115 cm	145 cm
Power *	9.5 W	14.5 W	17.5 W	22.5 W
Useful luminous flux *	1400 lm	2100 lm	2550 lm	3200 lm
Weight	182 g	252 g	312 g	382 g
EAN	7640185682436	7640185682429	7640185682412	7640185681736

GRAPHICS

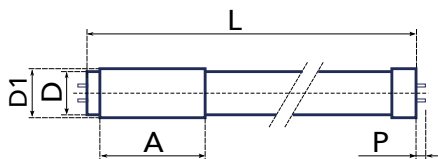

Drawing Information

N	55 cm	85 cm	115 cm	145 cm
L	550 mm	850 mm	1150 mm	1450 mm
D	28 mm	28 mm	28 mm	28 mm
D1	31 mm	31 mm	31 mm	31 mm
A	70 mm	70 mm	70 mm	70 mm
P	7.5 mm	7.5 mm	7.5 mm	7.5 mm

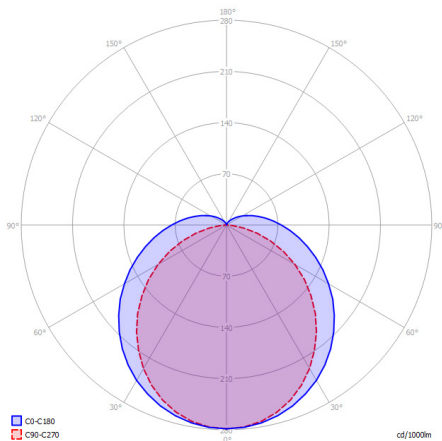

Measured on the largest available model with 4000K and CRI >80

CONTACT

LEDCity AG
Werdstrasse 21
CH-8004 Zurich
info@ledcity.io

The products of LEDCity are constantly being further developed. The pictures, drawings and specifications shown here represent the current status at the time of publication of this document and cannot be used as a point of a contract. During the validity of this document we reserve the right to make technical or formal changes to our products.

* Power and luminous flux are subject to initial tolerances of +/- 5%. Unless specified otherwise, they are measured as follows: Colour temperature of 4000K, CRI of 83+-2 and ambient temperature of 25°C. ** Delivery options. Standard: 4000K & CRI > 80